


电焊机专用电磁阀系列  
Solenoid Valves For Welding Series

**KJDS**

K23JD-S/K24JD-S

**K24JD-S** 系列二位四通电磁阀  
Series 4/2-way solenoid valves

图形符号 Graphical symbols

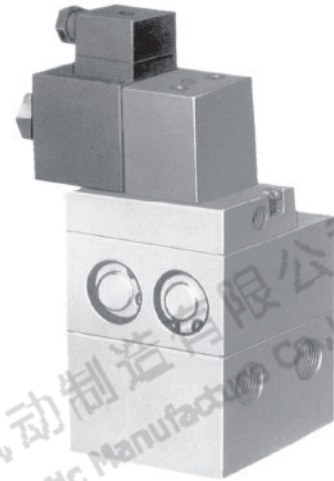

型号注释 Note for type




技术参数 Specification

型号 Type	K24JD-10S <sub>1</sub> K24JD-10S <sub>2</sub>	K24JD-15S <sub>1</sub> K24JD-15S <sub>2</sub>
性能 Item		
公称口径 Dia(mm)	10	15
接管螺纹 Size of port	G3/8	G1/2
工作压力范围 Working pressure range(Mpa)	0.2~0.8	
介质温度 Medium tempt(°C)	5~50	
环境温度 Ambient tempt(°C)	5~50	
换向时间 Diverting time(sec)	≤0.06	
最高切换频率 Max switch over frequency(Hz)	≥8	
有效截面积S值 Effective sectional area S valve(mm <sup>2</sup> )	40	60
泄漏量 Leakage rate(mL/min)	≤25	

K23JD-10S<sub>1</sub>(15S<sub>1</sub>)

K23JD-10S<sub>2</sub>(15S<sub>2</sub>)

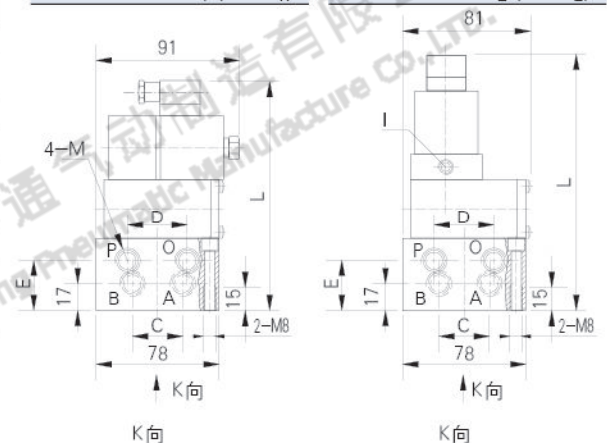

外形尺寸 Outlook & Dimension

螺纹 Threads	C	D	E	F	L	M	I
型号 Type							
K24JD-10S <sub>1</sub>	32	38	31	64	145	G3/8	
K24JD-10S <sub>2</sub>					160		G1/8
K24JD-15S <sub>1</sub>	35	35	36	64	150	G1/2	
K24JD-15S <sub>2</sub>					165		G1/8

